


**PAKISTAN STANDARD  
FOR**

**UNIFORM TECHNICAL PRESCRIPTIONS CONCERNING APPROVAL  
OF IMMOBILIZERS AND APPROVAL OF A VEHICLE WITH REGARD  
TO ITS IMMOBILIZER**

PS\_\_\_\_:\_\_\_\_2022

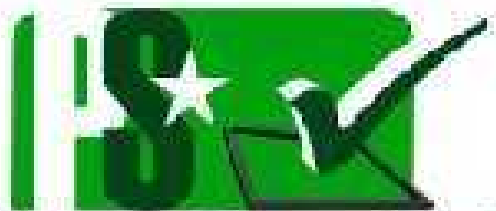

**Pakistan Standards**

**PSQCA Complex, Standardization, 1<sup>st</sup> Floor, Plot-ST-7/A, Block-3,  
Scheme No.36, Gulistan-e-Jauher, Karachi. (75290)**

Copyright © 2022 PSQCA. All rights reserved.

---

Draft Pakistan Standard

## CONTENTS

Sr. No.	Tittle	Page No.
	List of NSC Members .....	(ii)
	List of TC Members .....	(iii)
0.	Foreword .....	(1)
1.	Scope.....	(2)
2.	Reference.....	(2)
3.	Terminology .....	(2)
4.	Conformity Assessment & Evaluation .....	(2)
5.	Harmonization .....	(2)
6.	Annexure A (A1/ - A/25).....	A/1

Draft Pakistan Standard

**LIST OF MEMBERS OF NATIONAL STANDARDS COMMITTEE ON AUTOMOBILES (NSC-AUTO)**

**(AS OF 1<sup>st</sup> OCTOBER, 2021)**

#	Name (membership date), Mobile Number and CNIC Number	Educational Qualification and Relevant Experience	Category
1	Brig (Rtd.) Engr. Tariq Javed +92-32-3574 8959. CNIC 61106-1769343-1 <b>CHAIRPERSON</b>	M.S. Def. & Stgc. Studies, M.Sc. Maint. Aeronautics, B.E. Avionics. Above 33yrs experience. AERO/0419	Govt. / Public Sector (PEC)
2	Dr. Engr. Muhammad Alam Zaib Khan +92-33-2936 8952. CNIC 17301-1413442-5 <b>VICE-CHAIRPERSON</b>	Ph.D. Combustion & Energy Conversion, B.Sc. Mech. Engg. Above 17yrs of experience. MECH/17867	Academia (UET Peshawar) Chairperson TC-04 & TC-09
3	Engr. Asim Ayaz +92-30-0532 2100. CNIC 13101-7630174-3	M.S. Engg. Mgmt., M.B.A. Mktg., B.E. in Mech. Above 17yrs of experience. MECH/15131	Govt. / Public Sector (MoIP)
4	Mr. Imtiaz Hussain +92-33-3532 8593. CNIC 37405-7340342-7	M.Sc. Chemistry Above 28yrs experience.	Govt. / Public Sector (MoDP)
5	Mr. Nafay Idrees +92-34-5826 2329. CNIC 37405-0359215-5	B.S. Computer Science Above 10yrs of experience.	Govt. / Public Sector (M o Communications)
6	Dr. Engr. Bilal Muhammad Khan +92-33-2224 2701. CNIC 42101-1923713-1	Post Doc., Ph.D. Above 15yrs of experience. ELECTRO/6368	Academia (NUST) Chairperson TC -05
7	Dr. Engr. M. Mahmood Aslam Bhutta +92-34-2411 2092. CNIC 35202-2865816-5	Ph.D. in Mechanical Engineering Above 28yrs of experience. MECH/9301	Academia (UET Lahore)
8	Dr. Engr. Abdullah Mengal +92-30-0890 2886. CNIC 51401-7855373-3	Ph.D. in Mechanical Engineering Above 22yrs experience. MECH/13071	Academia (UET Khuzdar)
9	Engr. Munir Ahmed +92-32-2823 9492. CNIC 42101-6907932-5	M.Sc. in Mechanical Engineering Above 22yrs of experience. MECH/10511	Academia (NED UET Karachi) Chairperson TC -01
10	Mr. Saad Mahmood Sherani +92-32-1241 6093. CNIC 42000-3330262-9	MBA, BBA Above 7yrs of experience. 1081/S	Manufacturers/Associations (PAAPAM)
11	Engr. Muhammad Shuja-ul-Haq Siddiqui +92-30-0214 8237. CNIC 42201-4700865-3	B.E. in Mechanical, MBA Mktg. Above 16yrs of experience. MECH/18329	Manufacturers/Associations (PAAPAM)
12	Mr. Shaukat Qureshi +92-32-2821 8318. CNIC 42301-4198666-5	MBA Above 20yrs of experience.	Manufacturers/Associations (PEVPMATA)
13	Mr. Munir Ahmad +92-33-6290 0744. CNIC 54400-6720222-5	M.P.A., M.B.A., L.L.B. Extensive experience of consumer rights	Consumer Associations (CRCP)
14	Engr. Syed Shariq Hasan +92-30-0824 3003. CNIC 42301-0830607-7	M.E. in Mech., B.E. in Mech. Above 33yrs of experience.	Consumer Associations (FOAP) Chairperson TC-08
15	Engr. Zulfiqar A. Dhakan +92-33-3380 5590. CNIC 42201-6134514-7	M.E., MBA. LLB. B.E. in Chemical Above 35yrs experience. CHEM/1572	Consumer Associations (CAP) Chairperson TC -10
16	Mr. Nadeem Iqbal +92-33-3512 6506. CNIC 61101-1202974-9	M.A. Above 9yrs as CEO of TNCP	Consumer Associations (The Network for CP)
17	Mr. Kaukab Iqbal +92-33-3212 8919. CNIC 42101-2253863-1	B. Tech. Electrical Above 15 years of CP experience.	Consumer Associations (CAP)
18	Mr. Tanveer Ahmed Sheikh +92-30-0843 2228. CNIC 42000-1418855-9	B.A. Above 15yrs as Entrepreneur.	FPCCI
19	Engr. Muhammad Musaddiq Iqbal +92-33-3522 8937. CNIC 37405-8271298-7	M.Sc. Ind. Engg. PGD in Env. Design, B.E. in Mech. Above 15yrs experience. MECH/18968	PSQCA (Member & Secretary to NSC-Auto)
20	Dr. Engr. Raja Amir Azeem +92-333-5381515. CNIC 61101-9606500-9	Ph.D. MECH/10488	Chairperson TC-02 & TC-07
21	Mr. Zubair Amir +92-32-18469005. CNIC 35202-7060580-3	Over 20 year Industrial Experience	Chairperson TC-03
22	Engr. Saif Ur Rehman +92-301 8225027. CNIC 42101-31916921-1	B.E. MECH/5089	Chairperson TC-06
23	Dr. M. Usman Ghani +92-300-9083405 CNIC 16202-0963830-3.	Ph.D. MECH/18598	Chairperson TC-11

**TECHNICAL COMMITTEE ON AUTOMOTIVE PARTS & ACCESSORIES (TC-09)**

**(AS NOTIFIED DATED: 14<sup>TH</sup> DECEMBER, 2021)**

#	Name, Membership date, CNIC, Contact.	Qualification	Member Status	Category
1	Dr. Engr. Muhammad. Alam Zaib Khan March 04, 2021 7301-1413442-5; +92-33-2936 8952.	<b>Ph.D. MECH/17867</b>	P-member Chairperson (Vice-chairperson NSC- Auto)	Academia UET Peshawar
2	Dr. Engr. Raja Amer Azim March 25, 2021 61101-9606500-9; +92-33-3538 1515.	<b>Ph.D. MECH/10488</b>	P-member	Academia CEME NUST
3	Dr. Engr. Aqil Inam Jan, 25 2021 35202-2682854-5; +92-321-4230073.	<b>Ph.D METAL/1322</b>	P-member	Academia The University of Punjab
4	Engr. Saif-ur-Rehman March 31, 2021 42101-3191692-1; +92-301-8225027	<b>B.E MECH/5089</b>	P-member	Consultant ICBE
5	Engr. Saad Aleem Khan Dec 26, 2020 42201-0648116-5; +92-301-2088337 +92 -324-2755230	<b>B.E/ M.Sc. Proj Mgmt MECH/6723</b>	P-member	Industry Novatex Ltd
6	Engr. Sohail Azim Dec, 24 2020 42101-1424633-1; +92-300-2503270.	<b>M.E. MECH/7167</b>	P-member	Industry TGTRC
7	Engr. Muhammad Rafi Jan, 21 2021 35202-2300169-1; +92-300-8438387.	<b>B.E. MECH/10015</b>	P-member	Industry HACL
8	Engr. Waseem Ahmed Mirza July 13, 2021 35202-2940269-1+92-333-4400996.	<b>M.E. METAL/566</b>	P-member	Public Sector QCC Lahore
9	Engr. Muhammad Musaddiq Iqbal Deputy Director (Technical), PSQCA	<b>M.E. MECH/18968</b>	P-member	PSQCA
10	Engr. Muhammad Bilal Qureshi Jan 21, 2021 42201-0408433-5; +92-334-3000759	<b>B.E MECH/16096</b>	P-member	Industry IML
11	Engr. Muhammad Yasir Arafat March 04, 2021 42101-18272230-3; +92-331-3508489	<b>B.E MECH/17622</b>	P-member	Industry PSMCL
12	Engr. Waleed Ahmed Khan March 04, 2021 17301-1051149-3 +92-336-9370937.	<b>B.E. MECH/42410</b>	P-member	Academia UET Peshawar
13	Syed. Muhammad Samad 42101-9101647-7; +92-301-8250678	M.Sc.	P-member	Industry MIL.
14	Mr. Shaikh Wasim Ahmed Sept, 21 <sup>st</sup> , 2021 42000-9184455-3 +92-333-2356261.	M.S	P-member	Industry Hi-Tech Automotive Products
15	Secretary to TC-09		To be nominated	
16	Engr. Benazir Faizi Assistant Director (Technical), PSQCA	<b>M.E. METAL/1825</b>	Alternate Secretary	PSQCA

**0. FOREWORD:**

- 0.1 This Pakistan Standard stands formulated by Pakistan Standards & Quality Control Authority with immediate effect based upon the recommendation of draft prepared by the Technical Committee on Automotive Parts & Accessories (TC-09) in its meeting held on 14<sup>th</sup> March, 2022 & National Standards Committee on automotive endorse the same in its meeting held on **21<sup>st</sup> April, 2022** for further procedural requirements. The competent Authority approved the same on \_\_\_\_\_.
02. Considering the fact that Pakistan has acceded to the 1958 agreement of the UN's ECE-WP.29 it was important to bring the Pakistan Standard at par with the international requirements. This Pakistan Standard has been formulated by considering UN-R 162 as the basis of it which is acknowledged with thanks.
- 0.3 This standard is subject to periodical review in order to keep pace with developments in technologies. Any suggestion for improvement will be recorded and placed before the concerned committee in due course.

## **1. SCOPE:**

This standard lays down the requirements and approval of Vehicles in the Event of A Frontal Collision with Focus on the Restraint S".

## **2. REFERENCES:**

The UN-R-162 i.e., Addendum 161: Regulation No. 162 with official text as E/ECE/505/Rev.3/Add.161/Rev.3/Amend listed in Annex-A is necessary adjunct to this standard.

## **3. TERMINOLOGY:**

**3.0** For the purpose of this standard, all definitions given in Annex-A shall apply.

**3.1** All words not defined in this standard would have the Standard English dictionary meaning however such technical terms not defined in this standard shall imply to mean as defined by UN-ECE-WP.29 and ISO.

## **4. CONFORMITY ASSESSMENT:**

**4.0** Conformity assessment (uniform approvals) against this standard may require testing from internationally recognized labs and conformity assessment (approvals) for Pakistani market may be carried out as per policies defined by the government from time to time.

**4.1** Requirements given in Annex-A shall stand as the official requirements of this standard.

## **5. VOLUNTARY COMPLIANCE AND ENFORCEMENT:**

**5.0** This standard is currently for voluntary compliance and its mandatory enforcement may only be carried out if declared compulsory by the Government.

## **6. HARMONIZATION:**

**6.0** This standard by virtue of incorporation of Annex-A stands harmonized with UN's Regulation No.162 under the WP.29 of ECE and shall be treated so for all international standardization activities.

# ANNEXURE – A

Draft Pakistan Standard



## **Agreement**

**Concerning the Adoption of Harmonized Technical United Nations Regulations for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these United Nations Regulations\***

(Revision 3, including the amendments which entered into force on 14 September 2017)

---

### **Addendum 161 – UN Regulation No. 162**

Date of entry into force as an annex to the 1958 Agreement: 30 September 2021

#### **Uniform technical prescriptions concerning approval of immobilizers and approval of a vehicle with regard to its immobilizer**

This document is meant purely as documentation tool. The authentic and legal binding text is: ECE/TRANS/WP.29/2021/49.



**UNITED NATIONS**

---

\* Former titles of the Agreement:  
Agreement concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958 (original version);  
Agreement concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, done at Geneva on 5 October 1995 (Revision 2).

## UN Regulation No. 163

### Uniform technical prescriptions concerning approval of immobilizers and approval of a vehicle with regard to its immobilizer Contents

	<i>Page</i>
Regulation	
1. Scope .....	4
2. Definitions .....	4
3. Application for approval .....	5
4. Approval .....	5
5. Specifications .....	6
6. Modification of the type and extension of approval .....	9
7. Conformity of production procedures .....	10
8. Penalties for non-conformity of production .....	10
9. Production definitively discontinued.....	10
10. Names and addresses of Technical Services responsible for conducting approval tests, and of the Type Approval Authorities.....	10
Annexes	
1a Information document.....	11
1b Information document.....	12
2a Communication.....	13
2b Communication.....	15
3 Arrangements of approval marks .....	17
4 Model of certificate of conformity .....	18
5 Model of installation certificate .....	19
6 Operation parameters and test conditions for an immobilizer.....	20
7 Electromagnetic compatibility .....	24

## 1. Scope

This UN Regulation applies to:

- 1.1. Approval of
  - (a) "If fitted" immobilizers primarily dedicated to vehicles of Categories M<sub>1</sub> and N<sub>1</sub> with a maximum mass of not more than 2 tonnes; and
  - (b) Vehicles of Category M<sub>1</sub> and vehicles of Category N<sub>1</sub> with a maximum mass of not more than 2 tonnes with regard to fitted immobilizers.<sup>1 2</sup>
- 1.2. At the request of the manufacturer, Contracting Parties may grant approvals to vehicles of other categories and to immobilizers for fitment to such vehicles.
- 1.3. This Regulation does not apply to radio transmission frequencies, whether or not related to the protection of vehicles against unauthorized use.

## 2. Definitions

- 2.1. "*Component*" means a device subject to the requirements of this regulation and intended to be part of a vehicle, which may be type-approved independently of a vehicle where this regulation makes express provisions for so doing;
- 2.2. "*Separate technical unit*" means a device subject to the requirements of this regulation and intended to be part of a vehicle, which may be type-approved separately, but only in relation to one or more specified types of vehicle where this regulation makes express provisions for so doing;
- 2.3. "*Manufacturer*" means the person or body who is responsible to the approval authority for all aspects of the type approval process and for ensuring conformity of production. It is not essential that the person or body is directly involved in all stage of the construction of the vehicle, system, component or separate technical unit which is the subject of the approval process.
- 2.4. "*Immobilizer*" means a device which is intended to prevent normal driving away of a vehicle under its own power (prevention of unauthorized use).
- 2.5. "*Control equipment*" means equipment necessary for the setting and/or unsetting of an immobilizer.
- 2.6. "*Status display*" means any device intended to indicate the status of the immobilizer (set/unset, change of set to unset and vice versa).
- 2.7. "*Set state*" means the state in which the vehicle cannot be driven normally under its own power.
- 2.8. "*Unset state*" means the state in which the vehicle can be driven normally.
- 2.9. "*Key*" means any device designed and constructed to provide a method of operating a locking system, which is designed and constructed to be operated only by that device
- 2.10. "*Override*" means a design feature which locks the immobilizer in the unset condition.
- 2.11. "*Rolling code*" means an electronic code consisting of several elements the combination of which changes at random after each operation of the transmitting unit.

<sup>1</sup> As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2 - <https://unece.org/transport/standards/transport/vehicle-regulations-wp29/resolutions>.

<sup>2</sup> Only vehicles with 12 volts electrical systems are considered.

x

- 2.12. "Type of immobilizer" means systems which do not differ significantly in such essential aspects as:
- (a) The manufacturer's trade name or mark;
  - (b) The kind of control equipment;
  - (c) The design of their operation on the relevant vehicle system(s) (as referred to in paragraph 5.2.1. below).
- 2.13. "Vehicle type with regard to its immobilizer" means vehicles which do not differ significantly in such essential aspects as:
- (a) The manufacturer's trade name or mark;
  - (b) Vehicle features which significantly influence the performances of the immobilizer;
  - (c) The type and design of the immobilizer.

### **3. Application for approval**

- 3.1. The application for approval of a vehicle or component type with regard to this Regulation shall be submitted by the manufacturer.
- 3.2. It shall be accompanied by an information document established in accordance with the model shown in Annex 1, and giving a description of the technical characteristics of the immobilizer and the method(s) of installation for each make and type of vehicle on which the immobilizer is intended to be installed.
- 3.3. Vehicle(s) / component(s) representative of the type(s) to be approved shall be submitted to the technical service responsible for conducting the approval tests.

### **4. Approval**

- 4.1. If the type submitted for approval to this Regulation meets the requirements of this Regulation, approval of that type shall be granted.
- 4.2. An approval number shall be assigned to each type approved. Its first two digits (at present 00, corresponding to the Regulation in its original form) shall indicate the series of amendments incorporating the most recent major technical amendment made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign the same number to another type of vehicle or component as defined in this Regulation.
- 4.3. Notice of approval or of extension of approval of a type pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 2 to this Regulation.
- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle or component conforming to a type approved under this Regulation, an international approval mark consisting of:
- 4.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval,<sup>3</sup> and

<sup>3</sup> The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev. 6, Annex 3-<https://unece.org/transport/standards/transport/vehicle-regulations-wp29/resolutions>.

- 4.4.2. The number of this Regulation, followed by the letter "R", a dash and the approval number, to the right of the circle prescribed in paragraph 4.4.1.
- 4.5. If a type conforms to a type approved, under one or more other UN Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1. need not be repeated; in such a case, the Regulation under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1.
- 4.6. The approval mark shall be clearly legible and be indelible.
- 4.7. In the case of a vehicle, the approval mark shall be placed close to or on the vehicle data plate affixed by the manufacturer.
- 4.8. In the case of a component approved separately as an immobilizer, the approval mark shall be affixed by the manufacturer to the major element(s) of the device. In the case of a component approved as an immobilizer under this regulation and an alarm system under UN Regulation No. 162 or UN Regulation No. 116, Supplement 7 to the original version, or UN Regulation No. 97 Supplement 8 to the 01 series of amendments both approval marks shall be affixed by the manufacturer to the major element(s) of the device.
- 4.9. Annex 3 to this Regulation gives examples of arrangements of approval marks.
- 4.10. As an alternative to the approval mark described in paragraph 4.4. above, a certificate of conformity shall be issued for every VAS offered for sale.
- 4.10.1. Where an immobilizer manufacturer supplies an unmarked immobilizer approved to this Regulation to a vehicle manufacturer, for fitment by that manufacturer as original equipment for a vehicle model or range of vehicle models, the immobilizer manufacturer shall supply a number of copies of the certificate of conformity to the vehicle manufacturer, sufficient for that manufacturer to obtain the vehicle approval of this Regulation.
- If the immobilizer is made up of separate components, its main component(s) shall bear a reference mark and the certificate of conformity shall provide a list of such reference marks.
- A model of the certificate of conformity is given in Annex4 to this Regulation.
- 4.11. When an immobilizer, approved to this Regulation or UN Regulation No. 116, Supplement 7 to the original version, or UN Regulation No. 97, Supplement 8 to the 01 series of amendments as a separate technical unit, is installed in a vehicle submitted for approval to this Regulation, tests required to be passed by an immobilizer in order to obtain approval to this Regulation shall not be repeated.

## **5. Specifications**

- 5.1. General Specifications
- 5.1.1. It shall be possible to set and unset the immobilizer in accordance with these requirements.
- 5.1.2. An immobilizer and its installation shall be so designed that any equipped vehicle continues to meet the technical requirements.
- 5.1.3. It shall not be possible for an immobilizer to enter the set state when the ignition key is in the engine running mode, except when:
- (a) The vehicle is equipped or intended to be equipped for ambulance, fire brigade or police purposes; or
  - (b) The engine is required to:
    - (i) Drive machinery forming part of, or mounted on, the vehicle for purposes other than driving the vehicle; or
    - (ii) Maintain the electrical power of the batteries of the vehicle at a level required for driving that machinery or apparatus;

and the vehicle is stationary with the parking brake applied. When this exception is used, this fact shall be stated under item 2 of the addendum to the communication document (Annex 2 to this Regulation).

- 5.1.4. It shall not be possible to permanently override an immobilizer.
- 5.1.5. The immobilizer shall be designed and built such that when installed it shall not adversely affect the designed function and the safe operation of the vehicle, even in the case of malfunction.
- 5.1.6. An immobilizer shall be designed and built such that, when installed on a vehicle, according to the manufacturer's instructions, it cannot rapidly and without attracting attention be rendered ineffective or destroyed by, e.g. the use of low cost easily concealed tools, equipment or fabrications readily available to the public at large. It shall be difficult and time consuming to replace a major component or assembly in order to bypass the immobilizer.
- 5.1.7. An immobilizer shall be so designed and built such that when installed as specified by the manufacturer it is able to withstand the environment within the vehicle for a reasonable lifetime (for testing see paragraph 5.3.). More particularly the electrical properties of the on-board circuitry shall not be adversely affected by the addition of the immobilizer (lead cross-sections, contact safety, etc.).
- 5.1.8. An immobilizer may be combined with other vehicle systems or may be integrated into them (e.g. engine management, alarm systems).
- 5.1.9. It shall not be possible for an immobilizer to prevent the release of the brakes of the vehicle, except in the case of an immobilizer which prevents the release of pneumatically released spring brakes<sup>4</sup> and functions in such a way that in normal operation, or in failure conditions, the technical requirements of UN Regulation No. 13 in force at the time of application for type approval under this Regulation are satisfied.  
  
Compliance with this paragraph does not exempt an immobilizer which prevents the release of pneumatically released spring brakes from the technical requirements set out in this Regulation.
- 5.1.10. It shall not be possible for an immobilizer to operate in such a manner as to apply the brakes of the vehicle.
- 5.2. Particular Specifications
  - 5.2.1. Extent of disablement
    - 5.2.1.1. An immobilizer shall be designed so as to prevent the operation of the vehicle under its own power by at least one of the following means:
      - 5.2.1.1.1. disable, in the case of after-market fitting, or vehicle equipped with diesel engine, at least two separate vehicle circuits that are needed for vehicle operation under its own power (e.g. starter motor, ignition, fuel supply, pneumatically released spring brakes, etc.);
      - 5.2.1.1.2. interference by code of at least one control unit required for the operation of the vehicle.
    - 5.2.1.2. An immobilizer for fitment to a vehicle equipped with a catalytic converter shall not cause unburnt fuel to enter the exhaust.
  - 5.2.2. Operating reliability

<sup>4</sup> As defined in Annex 8 of UN Regulation No. 13, as amended.

Operating reliability shall be achieved by suitable design of the immobilizer, account being taken of specific environmental conditions in the vehicle (see paragraphs 5.1.8. and 5.3.).

5.2.3. Operating safety

It shall be ensured that the immobilizer does not change its state (set/unset) as a result of any of the tests in paragraph 5.3.

5.2.4. Setting of the immobilizer

5.2.4.1. The immobilizer shall be set without supplementary action from the driver by at least one of the following means:

- (a) At rotation of the ignition key into the "0" position in the ignition lock and activation of a door; in addition, immobilizers which unset immediately before or during the normal starting procedure of the vehicle are permitted to set on turning the ignition off;
- (b) A maximum of 1 minute after removing the key of the ignition lock.

5.2.4.2. If the immobilizer can enter the set state when the ignition key is in the engine running mode as provided for in paragraph 5.1.4., the immobilizer may also be set by the opening of the driver's door and/or the authorised user carrying out a deliberate action.

5.2.5. Unsetting

5.2.5.1. Unsetting shall be achieved by using one or a combination of the following devices. Other devices with an equivalent level of security giving equivalent performance are permitted.

5.2.5.1.1. A key pad for inputting an individually selectable code having at least 10,000 variants.

5.2.5.1.2. Electrical/electronic device, e.g. remote control, with at least 50,000 variants and shall incorporate rolling codes and/or have a minimum scan time of ten days, e.g. a maximum of 5,000 variants per 24 hours for 50,000 variants minimum.

5.2.5.1.3. If unsetting can be achieved via a remote control, the immobilizer shall return to the set condition within 5 minutes after unsetting if no supplementary action on the starter circuit has been undertaken.

5.2.6. Status display

5.2.6.1. To provide information on the status of the immobilizer (set/unset, change of set to unset and vice versa), optical displays inside and optical signals outside the passenger compartment are allowed. Any optical signal or any use of lighting and light-signalling devices outside the passenger compartment shall fulfil the requirements of Regulation No. 48.

5.2.6.2. If an indication of short-term "dynamic" processes such as changes from "set" to "unset" and vice versa is provided, it shall be optical, according to paragraph 5.2.6.1. Such optical indication may also be produced by the simultaneous operation of the direction indicators and/or passenger compartment lamp(s), provided that the duration of the optical indication by the direction indicators does not exceed 3 seconds.

5.3. Operation parameters and test conditions

All components of the immobilizer shall be submitted to the tests described in Annex 6.

5.4. Instructions

(Paragraphs 5.4.1. to 5.4.3. for the purposes of aftermarket installation only).

Each immobilizer shall be accompanied by:

- 5.4.1. Instructions for installation.
  - 5.4.1.1. The list of vehicles and vehicle models for which the device is intended. This list may be specific or generic, e.g. "all cars with petrol engines and 12 V negative earth batteries".
  - 5.4.1.2. The method of installation illustrated by photographs and/or very clear drawings.
  - 5.4.1.3. Detailed installation instructions provided by the supplier shall be such that when correctly followed by a competent installer, the safety and reliability of the vehicle is not affected.
  - 5.4.1.4. The supplied installation instructions shall identify the electrical power requirements of the immobilizer and, where relevant, shall advise an increasing of battery size.
  - 5.4.1.5. The supplier shall provide post installation procedures for checking the vehicle. Particular attention shall be drawn to safety related features.
- 5.4.2. A blank installation certificate, an example of which is given in Annex 5.
- 5.4.3. A general statement to the immobilizer purchaser calling his attention to the following points:
  - 5.4.3.1. The immobilizer should be installed in accordance with the manufacturer's instructions;
  - 5.4.3.2. The selection of a good installer is recommended (the immobilizer manufacturer may be contacted to indicate appropriate installers);
  - 5.4.3.3. The installation certificate supplied with the immobilizer should be completed by the installer.
- 5.4.4. Instructions for use.
- 5.4.5. Instructions for maintenance.
- 5.4.6. A general warning regarding the dangers of making any alterations or additions to the immobilizer; such alterations and additions would automatically invalidate the certificate of installation referred to in paragraph 5.4.2. above.

## **6. Modification of the type and extension of approval**

- 6.1. Every modification of a vehicle or component type with regard to this Regulation shall be notified to the Type Approval Authority which approved the vehicle or component type. The department may then either:
  - 6.1.1. Consider that the modifications made are unlikely to have an appreciable adverse effect and that in any case the component or the vehicle still complies with the requirements, or
  - 6.1.2. Require a further report from the technical service responsible for conducting the tests.
- 6.2. Confirmation or refusal of approval, specifying the alteration, shall be communicated by the procedure specified in paragraph 4.3. above to the Contracting Parties to the Agreement applying this Regulation.
- 6.3. The Type Approval Authority issuing the extension of approval shall assign a serial number to each communication form drawn up for such an extension.



## **7. Conformity of production**

- 7.1. Procedures concerning conformity of production shall comply with those set out in the 1958 Agreement, Schedule 1 (E/ECE/TRANS/505/Rev.3) and meet the following requirements:
- 7.2. For each type of vehicle or component the tests prescribed in the relevant part(s) of this Regulation shall be carried out on a statistically controlled and random basis, in accordance with one of the regular quality assurance procedures;
- 7.3. The Type Approval Authority which has granted approval may at any time verify the conformity of control methods applicable to each production unit. The normal frequency of such inspections shall be once every two years.

## **8. Penalties for non-conformity of production**

- 8.1. The approval granted in respect of a vehicle/component type pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 7 40. above are not complied with.
- 8.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a form conforming to the model in Annex 2.

## **9. Production definitively discontinued**

If the holder of the approval completely ceases to manufacture a vehicle/component type approved in accordance with this Regulation, he shall so inform the authority which granted the approval. Upon receiving the relevant communication, that authority shall inform thereof the other Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 2.

## **10. Names and addresses of Technical Services responsible for conducting approval tests, and of Type Approval Authorities**

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations secretariat the names and addresses of the technical services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval, issued in other countries are to be sent.

## Annex 1a

### Information document

(Maximum format: A4 (210 mm x 297 mm))

#### Information document

In accordance with paragraph 5. of UN Regulation No. 162 relating to system type approval of a vehicle type with regard to an immobilizer system

#### 1. General

- 1.1. Make (trade name of manufacturer): .....
- 1.2. Type: .....
- 1.3. Means of identification of type, if marked on the device (b): .....
- 1.3.1. Location of that marking: .....
- 1.4. Name and address of manufacturer: .....
- 1.5. Location of the ECE approval mark: .....
- 1.6. Address(es) of assembly plant(s): .....

#### 2. General construction characteristics of the vehicle

- 2.1. Photographs and/or drawings of a representative vehicle: .....
- 2.2. Hand of drive: left / right (Strike out what does not apply)

#### 3. Miscellaneous

- 3.1. Vehicle immobilizer: .....
- 3.1.1. type approval number, if available: .....
- 3.1.1.1. A detailed description of the vehicle type with regard to the arrangement of the installed Immobilizer illustrated by photographs and/or drawings (where the immobilizer is already type approved as a separate technical unit, reference may be made to the description in paragraph 4.2. of the immobilizers manufacturer's information document): .....
- 3.1.2. For immobilizers not yet approved
- 3.1.2.1. A detailed technical description of the vehicle immobilizer and of the measures taken against inadvertent activation: .....
- 3.1.2.2. The system(s) on which the vehicle immobilizer acts: .....
- 3.1.2.3. Number of effective interchangeable codes, if applicable: .....

## Annex 1b

### Information document

(Maximum format: A4 (210 mm x 297 mm))

In accordance with paragraph 5. of Regulation No. 162 on uniform technical prescriptions concerning approval of immobilizers and approval of a vehicle with regard to its immobilizer (relating to UN component or separate technical unit type approval of an immobilizer system).

#### 1. General

- 1.1. Make (trade name of manufacturer): .....
- 1.2. Type: .....
- 1.3. Means of identification of type, if marked on the device <sup>(a)</sup>: .....
- 1.3.1. Location of that marking: .....
- 1.4. Name and address of manufacturer: .....
- 1.5. Location of the UN approval mark: .....
- 1.6. Address(es) of assembly plant(s): .....

#### 2. Description of the device

- 2.1. A detailed technical description of the vehicle immobilizer and of the measures taken against inadvertent activation: .....
- 2.2. The vehicle system(s) on which the vehicle immobilizer acts: .....
- 2.3. Method of setting/unsetting the device: .....
- 2.4. Number of effective interchangeable codes, if applicable: .....
- 2.5. List of main components comprising the device and, if applicable, their reference marks: .....

#### 3. Drawings

- 3.1. Drawings of the main components of the device (the drawings shall show the intended space for UN type approval mark): .....

#### 4. Instructions

- 4.1. List of vehicles to which the device is intended to be fitted: .....
- 4.2. Description of the method of installation illustrated by photographs and/or drawings: .....
- 4.3. Instructions for use: .....
- 4.4. Instructions for maintenance, if any: .....
- 4.5. Test pulse 5a/5b according to the International Standard ISO 7637-2:2004: applied / not applied: .....

<sup>(a)</sup> If the means of identification of type contains characters not relevant to describe the component or separate technical unit types covered in this information document, such characters shall be represented in the documentation by the symbol "?" (e.g. ABC??123??).

## Annex 2a

### Communication

(Maximum format: A4 (210 x 297 mm))



issued by:

Name of administration:

.....  
.....  
.....

Concerning:<sup>6</sup>

Approval granted  
Approval extended  
Approval refused  
Approval withdrawn  
Production definitively discontinued

of a type of device for indirect vision pursuant to UN Regulation No. 162

Approval No. ....

#### Section I

##### 1. General

- 1.1. Make (trade name of manufacturer): .....
- 1.2. Type: .....
- 1.3. Means of identification of type, if marked on the vehicle/component/ separate technical unit <sup>2/(a)</sup>: .....
- 1.3.1. Location of that marking: .....
- 1.4. Category of vehicle <sup>(b)</sup>: .....
- 1.5. Name and address of manufacturer: .....
- 1.6. Location of the ECE approval mark: .....
- 1.7. Address(es) of assembly plant(s): .....

#### Section II

1. Additional information (where applicable): see addendum
2. Technical service responsible for carrying out the tests: .....
3. Date of test report: .....
4. Number of test report: .....
5. Remarks (if any): see addendum
6. Place: .....
7. Date: .....
8. Signature: .....
9. The index to the information package lodged with the approval authority, which may be obtained on request, is attached: .....

<sup>1</sup> Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulations).

<sup>6</sup> Strike out what does not apply (there are cases where nothing needs to be deleted, when more than one ntry is applicable).

## **Addendum to UN type approval certificate No. ...**

Concerning the type approval of a vehicle with regard to Regulation No. 162

1. Additional information:.....
- 1.1. Brief description of the immobilizer: .....
2. Remarks: .....

---

Notes for approval certificate/communication form:

- (a) If the means of identification of type contains characters not relevant to describe the vehicle, component or separate technical unit types covered in this information document, such characters shall be represented in the documentation by the symbol "?" (e.g. ABC??123??).
- (b) As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2 -<https://unece.org/transport/standards/transport/vehicle-regulations-wp29/resolutions>.

Annex 2b

## Communication

(Maximum format: A4 (210 x 297 mm))



issued by:

Name of administration:

.....  
.....  
.....

Concerning:<sup>8</sup>

Approval granted  
Approval extended  
Approval refused  
Approval withdrawn  
Production definitively discontinued

of a type of device for indirect vision pursuant to UN Regulation No. 162

Approval No. ....

Reason for extension:

### Section I

1. General.....
- 1.1. Make (trade name of manufacturer): .....
- 1.2. Type: .....
- 1.3. Means of identification of type, if marked on the device (a): .....
- 1.3.1. Location of that marking: .....
- 1.4. Name and address of manufacturer: .....
- 1.5. Location of the ECE approval mark: .....
- 1.6. Address(es) of assembly plant(s): .....

### Section II

1. Additional information (where applicable): see addendum
2. Technical service responsible for carrying out the tests: .....
3. Date of test report: .....
4. Number of test report: .....
5. Remarks (if any): see addendum
6. Place: .....
7. Date: .....
8. Signature: .....
9. The index to the information package lodged with the approval authority, which may be obtained on request, is attached.

<sup>1</sup> Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulations).

<sup>8</sup> Strike out what does not apply (there are cases where nothing needs to be deleted, when more than one entry is applicable).

Addendum

to UN type approval certificate No. ...

concerning the type approval of an immobilizer with regard to Regulation No. 162

1. Additional information:.....
- 1.1. Brief description of the immobilizer: .....
- 1.2. List of vehicles to which the immobilizer is intended to be fitted: .....
- 1.3. Types of vehicles on which the immobilizer has been tested: .....
- 1.4. List of main components, duly identified, comprising the immobilizer: .....
2. Remarks: .....

Notes for approval certificate/communication form:

- (a) If the means of identification of type contains characters not relevant to describe the component or separate technical unit types covered in this information document, such characters shall be represented in the documentation by the symbol "?" (e.g. ABC??123??).

## Annex 3

### Arrangements of approval marks

**Article I. Figure 1**  
(see paragraph 4.2. of this Regulation)



$a = 8 \text{ mm min}$

The above approval mark figure 1 affixed to a vehicle shows that the type concerned was approved in the Netherlands (E 4) pursuant to UN Regulation No. 162 under approval No. 001234. The first two digits (00) of the approval number indicate that the approval was granted in accordance with the requirements of UN Regulation No. 162 in its original form.



## Annex 4

### Model of certificate of conformity

I the undersigned .....

(surname and name)

Testify that the vehicle immobilizer described below:

Make: .....

Type: .....

is in total conformity with the type approved

at ..... on .....

(place of approval)

(date)

as described in the communication form bearing approval No. ....

Identification of the main component(s):

Component: ..... Marking: .....

Done at: ..... on: .....

Manufacturer's full address and stamp: .....

Signature : ..... (please specify position).

## Annex 5

### Model of installation certificate

I the undersigned .....  
professional installer, certify that the installation of the immobilizer described below has been  
carried out by myself pursuant to the mounting instructions supplied by the manufacturer of the  
system.

#### Description of the vehicle

Make: .....

Type: .....

Serial number: .....

Registration number: .....

#### Description of the immobilizer

Make: .....

Type: .....

Approval number: .....

Done at: ..... on: .....

Installer's full address and stamp:.....

.....

.....

Signature: ..... (please specify position)

## Annex 6

### Operation parameters and test conditions for an immobilizer

#### 1. Operation parameters

The requirements below do not apply to:

- (a) Those components that are fitted and tested as part of the vehicle, whether or not an immobilizer is fitted (e.g. lamps, alarm system, device to prevent unauthorized use by mean of a locking system); or
- (b) Those components that have previously been tested as part of the vehicle and documentary evidence has been provided.

All components of the immobilizer shall operate without any failure under the following conditions.

##### 1.1. Climatic conditions

Two classes of environmental temperature are defined as follows:

- (a)  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for parts to be fitted in the passenger or luggage compartment,
- (b)  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  for parts to be fitted in the engine compartment unless otherwise specified.

##### 1.2. Degree of protection for installation

The following degrees of protection in accordance with IEC Publication 529 1989 shall be provided:

- (a) IP 40 for parts to be fitted in the passenger compartment,
- (b) IP 42 for parts to be fitted in the passenger compartment of roadsters/convertibles and cars with moveable roof-panels if the installation location requires a higher degree of protection than IP 40,
- (c) IP 54 for all other parts.

The immobilizer manufacturer shall specify in the installation instructions any restrictions on the positioning of any part of the installation with respect to dust, water and temperature.

##### 1.3. Weatherability

7 days according to IEC 68-2-30-1980.

##### 1.4. Electrical conditions

Rated supply voltage: 12 V

Operation supply voltage range: from 9 V to 15 V in the temperature range according to paragraph 1.1.1

Time allowance for excess voltages at  $23^{\circ}\text{C}$ :

$U = 18\text{ V}$ , max. 1 h

$U = 24\text{ V}$ , max. 1 min.

#### 2. Test conditions

All the tests shall be carried out in sequence on a single immobilizer. However, at the discretion of the Type Approval Authority, other samples may be used if this is not considered to affect the results of the other tests.

- 2.1. Normal test conditions  
Voltage  $U = (12 \pm 0.2) \text{ V}$   
Temperature  $T = (23 \pm 5)^\circ\text{C}$
3. Operation test  
All components of the immobilizer shall comply with prescriptions given in paragraphs 3.2. to 3.9. of this Regulation.
- 3.1. Upon completion of all the tests specified below, the immobilizer shall be tested under the normal test conditions specified in paragraph 2.1. of this Regulation to check that it continues to function normally. Where necessary, fuses may be replaced prior to the test.  
  
If some of the tests required in each of these paragraphs prior to the operation tests are performed in series on a single immobilizer, the operation test may be carried out one time only after the chosen tests are completed instead of performing the operation tests required in the paragraphs after each of the chosen tests. Vehicle manufacturers and suppliers have to guarantee satisfactory results only on non-accumulated procedures.
- 3.2. Resistance to temperature and voltage changes  
Compliance with the specifications defined under paragraph 3.1 shall also be checked under the following conditions:
- 3.2.1. Test temperature  $T = (-40 \pm 2)^\circ\text{C}$   
Test voltage  $U = (9 \pm 0.2) \text{ V}$   
Storage duration 4 hours
- 3.2.2. For parts to be fitted in the passenger or luggage compartment:  
Test temperature  $T = (+85 \pm 2)^\circ\text{C}$   
Test voltage  $U = (15 \pm 0.2) \text{ V}$   
Storage duration 4 hours
- 3.2.3. For parts to be fitted in the engine compartment unless otherwise specified:  
Test temperature  $T = (+125 \pm 2)^\circ\text{C}$   
Test voltage  $U = (15 \pm 0.2) \text{ V}$   
Storage duration 4 hours
- 3.2.4. The immobilizer, in both set and unset state, shall be submitted to an excess voltage equal to  $(18 \pm 0.2) \text{ V}$  for 1 hour.
- 3.2.5. The immobilizer, in both set and unset state, shall be submitted to an excess voltage equal to  $(24 \pm 0.2) \text{ V}$  for 1 min.
- 3.3. Safe operation after foreign body and water-tightness testing  
After the test for tightness to foreign body and water according to IEC 529-1989, for degrees of protection as in paragraph 1.1.2., the operation tests according to paragraph 3.1. shall be repeated.  
  
With the agreement of the Technical Service this requirement need not apply in the following circumstances:
- (a) Type Approval of an immobilizer which is to be type approved as a separate technical unit  
  
In this case, the manufacturer of the immobilizer shall:

- (i) Specify in item 4.5. of the information document (Annex 1b), that the requirement of this paragraph was not applied to the immobilizer (in accordance with paragraph 7. of this Regulation), and
  - (ii) Specify in item 4.1. of the information document, the list of vehicles to which the immobilizer is intended to be fitted and the relevant installation conditions in item 4.2.
- (b) Type approval of a vehicle in respect of an immobilizer  

In this case, the manufacturer shall specify in item 3.1.1.1. of Annex 1a of the information document (Annex 1a), that the requirement of this paragraph does not apply to the immobilizer due to the nature of installation conditions and the vehicle manufacturer shall prove it by submitting related documents.
- (c) Type approval of a vehicle in respect of the installation of an immobilizer which is type approved as a separate technical unit.  

In this case, the vehicle manufacturer shall specify in item 3.1.1.1. of Annex 1a of the information document (Annex 1a), that the requirement of this paragraph does not apply to the installation of the immobilizer where the relevant installation conditions are met.

This requirement does not apply in cases where the information required in item 3.1.3.1.1. of Annex 1a has already been submitted for the approval of the separate technical unit.
- 3.4. Safe operation after condensed water test  

After a resistance-to-humidity test to be carried out according to IEC 68 2 30 (1980) the operation tests according to paragraph 3.1. shall be repeated.
- 3.5. Test for safety against reversed polarity  

The immobilizer and components thereof shall not be destroyed by reversed polarity up to 13 V during 2 min. After this test the operation tests according to paragraph 3.1. shall be repeated with fuses changed, if necessary.
- 3.6. Test for safety against short-circuits  

All electrical connections of the immobilizer must be short-circuit proof against earth, max. 13 V and/or fused. After this test the operation tests according to paragraph 3.1. shall be repeated, with fuses changed if necessary.
- 3.7. Energy consumption in the set condition  

The energy consumption in set condition under the conditions given in paragraph 2.1. shall not exceed 20 mA on average for the complete immobilizer including status display.

With the agreement of the Technical Service this requirement need not apply in the following circumstances:

  - (a) Type Approval of an immobilizer which is to be type approved as a separate technical unit  

In this case, the manufacturer of the immobilizer shall:

    - (i) Specify in item 4.5. of the information document (Annex 1, Part 2), that the requirement of this paragraph was not applied to the immobilizer (in accordance with paragraph 7. of this regulation), and
    - (ii) Specify in item 4.1. of the information document, the list of vehicles to which the immobilizer is intended to be fitted and the relevant installation conditions in item 4.2.

(b) Type approval of a vehicle in respect of an immobilizer

In this case, the manufacturer shall specify in item 3.1.3.1.1. of the information document (Annex 1a), that the requirement of this paragraph does not apply to the immobilizer due to the nature of installation conditions and the vehicle manufacturer shall prove it by submitting related documents.

(c) Type approval of a vehicle in respect of the installation of an immobilizer which is type approved as a separate technical unit.

In this case, the vehicle manufacturer shall specify in item 3.1.3.1.1. of the information document (Annex 1a), that the requirement of this paragraph does not apply to the installation of the immobilizer where the relevant installation conditions are met.

This requirement does not apply in cases where the information required in item 3.1.3.1.1. of Annex 1a has already been submitted for the approval of the separate technical unit.

3.8. Safe operation after vibration test

3.8.1. For this test, the components are subdivided into two types:

Type 1: components normally mounted on the vehicle,

Type 2: components intended for attachment to the engine.

3.8.2. The components/immobilizer shall be submitted to a sinusoidal vibration mode whose characteristics are as follows:

3.8.2.1. For Type 1

The frequency shall be variable from 10 Hz to 500 Hz with a maximum amplitude of  $\pm 5$  mm and maximum acceleration of 3 g (0-peak).

3.8.2.2. For Type 2

The frequency shall be variable from 20 Hz to 300 Hz with a maximum amplitude of  $\pm 2$  mm and maximum acceleration of 15 g (0-peak).

3.8.2.3. For both type 1 and type 2

The frequency variation is 1 octave/min.

The number of cycle is 10, the test shall be performed along each of the 3 axes.

The vibrations are applied at low frequencies at a maximum constant amplitude and at a maximum constant acceleration at high frequencies.

3.8.3. During the test the immobilizer shall be electrically connected and the cable shall be supported after 200 mm.

3.8.4. After the vibration test the operation tests according to paragraph 3.1. shall be repeated.

3.9. Electromagnetic compatibility

The immobilizer shall be submitted to the tests described in Annex 7.

## Annex 7

### Electromagnetic compatibility

#### 1. Immunity against disturbances conducted along supply lines

- 1.1 Tests shall be performed according to the technical prescriptions and transitional provisions of Regulation No. 10.06 series of amendments and according to the test methods described in Annex 10 for an Electrical/Electronic Sub-Assembly (ESA).
- 1.2 The immobilizer shall be tested in unset state and in set state

#### 2. Immunity against radiated high frequency disturbances

- 2.1 Testing of the immunity of an immobilizer in a vehicle may be performed according to the technical prescriptions and transitional provisions of Regulation No. 10, 06 series of amendments and test methods described in Annex 6 for the vehicles or Annex 9 for an Electrical/Electronic Sub-Assembly (ESA)
- 2.2 The immobilizer shall be tested with operating conditions and failure criteria as defined in table 1

Table 1

**Operating conditions and failure criteria for immobilizer**

<i>Test type</i>	<i>Immobilizer operating conditions</i>	<i>Failure criteria</i>
Vehicle test	Immobilizer in unset state	Unexpected activation of the immobilizer
	Key ON or Vehicle at 50 km/h <sup>(1)</sup>	
	Immobilizer in set state	Unexpected deactivation of the immobilizer
	Key OFF	
ESA Test	Immobilizer in set state	Unexpected deactivation of the immobilizer
	Vehicle in charging mode (if applicable)	
	Immobilizer in unset state	Unexpected activation of the immobilizer
	Immobilizer in set state	

(1) This test can be covered by the UN Regulation No. 10 50 km/h mode

#### 3. Electrical disturbance from electrostatic discharges

- 3.1 Immunity against electrical disturbances shall be tested in accordance with Technical ISO 10605-2008 + corrigendum:2010 + AMD1:2014 using the test severity levels from table 2.
- 3.2 ESD tests shall be performed either at vehicle level or at Electrical/Electronic Sub-Assembly (ESA) level.

Table 2  
**ESD Test levels**

<i>Discharge type</i>	<i>Discharge points</i>	<i>Immobilizer state</i>	<i>Discharge network</i>	<i>Test Level</i>	<i>Failure criteria</i>
Air discharge	Points that can easily be accessed only from the inside of the vehicle	Immobilizer in unset state (if test performed on vehicle then vehicle shall be Key ON or Vehicle at 50 km/h or engine in idle mode)	330 pF, 2 k	± 6 kV	Unexpected activation of the immobilizer
	Points that can easily be touched only from the outside of the vehicle	Immobilizer in set state (if test performed on vehicle then vehicle shall be locked and Key OFF)	150 pF, 2 k	± 15 kV	Unexpected deactivation of the immobilizer without reactivation, within 1s, after each discharge
Contact discharge	Points that can easily be accessed only from the inside of the vehicle	Immobilizer in unset state (if test performed on vehicle then vehicle shall be Key ON or Vehicle at 50 km/h or engine in idle mode)	330 pF, 2 k	± 4 kV	Unexpected activation of the immobilizer
	Points that can easily be touched only from the outside of the vehicle	Immobilizer in set state (if test performed on vehicle then vehicle shall be locked and Key OFF)	150 pF, 2 k	± 8 kV	Unexpected deactivation of the immobilizer without reactivation, within 1s, after each discharge

Each test shall be performed with 3 discharges with a minimum of 5 s interval between each discharge

#### **4. Radiated emissions**

- 4.1. Tests shall be performed according to the technical prescriptions and transitional provisions of Regulation No. 10, 04 series of amendments and according to the test methods described in Annexes 4 and 5 for vehicles or Annexes 7 and 8, for an Electrical/Electronic Sub-Assembly (ESA).
- 4.2. The immobilizer shall be in set state.

**ENDED**



Draft Pakistan Standard